


Teleskopteil (Standard)

für teleskopierbare Stützen mit Bolzenabsteckung

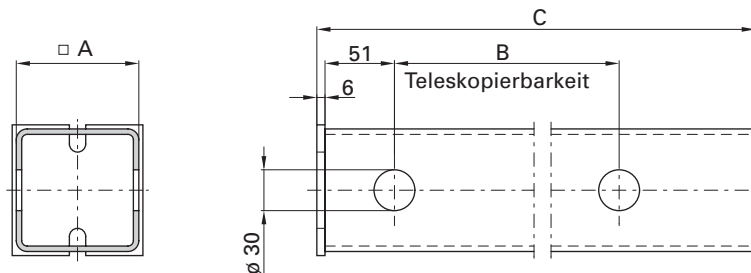


Auswahltabelle / lieferbare Ausführungen

B (mm)	C (mm)	SS 86 (A 90 mm)	RS 7090 (A 80 mm)	RS 7080 (A 70 mm)	RS 7100 (A 60 mm)
1 x 100	236	640.277.000	640.075.006	640.076.006	640.181.300
2 x 100	406	640.192.000	640.520.300		
3 x 100	506	640.349.200	640.691.300	640.491.200	
4 x 100	606	640.286.300			
2 x 50	236	640.665.300	640.257.300	640.924.300	640.509.300
4 x 50	406	640.288.200	640.584.300		
5 x 50	456	640.282.200	641.034.300		
6 x 50	506	640.261.200	640.290.200		641.042.300
7 x 50	556	640.430.300			640.898.300
8 x 50	606	640.523.300			

Unverlierbares Teleskopteil

für teleskopierbare Stützen mit unverlierbarem Teleskop der Baureihe SS 86TSKX

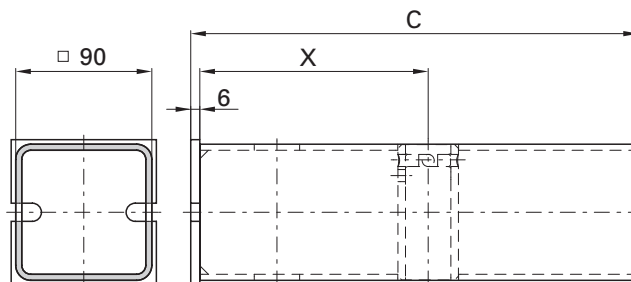

Auswahltabelle / lieferbare Ausführungen

C (mm)	X (mm)	Teleskopierbarkeit (mm)	Schrittweite (mm)	Artikel-Nr.
236	151	100	2 x 50	640.738.300
236	151	100	1 x 100	640.738.300
236	171	100	2 x 50*	640.787.300
236	171	100	1 x 100*	640.787.300
406	251	200	4 x 50	640.737.300
406	251	200	2 x 100	640.737.300
456	301	250	5 x 50	641.144.300
506	351	300	6 x 50	640.862.300
506	351	300	3 x 100	640.862.300
556	401	350	7 x 50	640.968.300
606	451	400	8 x 50	640.911.300
606	451	400	4 x 100	640.911.300

* (mit Traghakenbohrung)